

ACCESSORIES

Lamphead Control
powerCon Cable
P.O. Yoke (Hanging)
Manual Yoke (Standing)
Protection Cap
Modifier
Cable for Control Panel
DMX Cable
Barndoors
Safety

MODIFIER

OPTICS:
Open Face 15°, 30°, 60°
Fresnel Lense 15-65°

DOMES:
Dome M, Dome S

SOFTBOX:
Octa 4
+ Eyelight Baffle
+ Eggcrate
+ Magic Cloth

SIZE/WEIGHT

30,5 x 33 x 41 cm
11,7 kg

WATERPROOF RATING

IP20

LIGHT/COLOR SPECS

MODES:
CCT, HSI, individual color, gel selection, x/y coordinates,
source matching, lighting effects, color sensor mode

WHITE LIGHT:
2,000 K to 20,000K continuously variable


COLOR RENDITION:
CRI Average > 98
TLCI Average > 95

LIGHT ENGINE

SIX-COLOR Light Engine ARRI Spectra

LEDs:
red, green, blue, amber, cyan, lime

ARRI ORBITER

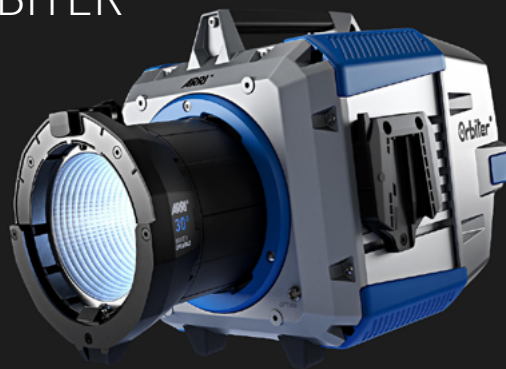

MOUNT

28 mm Spigot
(Junior Pin)

LIGHT APERTURE

1m at 5600K: 21500 lux (60°)	1m at 3200K: 16300 lux (60°)
58000 lux (30°)	44700 lux (30°)

CONTROL OPTIONS

On-Board Control on Graphical Display
Wireless DMX
W-DMX
LAN (Art-Net, sACN)

POWER

Power Consumption:
500 W max.

Voltage Input Range:
100 - 240 V

DIMMING

Smooth, 100 – 0%,
continuously, linear /
exponential /
logarithmic /
„S“ curve

SPECIALS

Changeable Optics („HotSwap“)
Light match
CCT & Gel effects
Modes: High Color Rendering, High Output, Low Noise
Removable Control Panel
Different Yoke types for hanging and standing!
The more directional the Optic, the softer the edge

CONNECTIVITY

Removable Control Panel
5-pin XLR in and through
EtherCON in and through
2 x USB-A
USB-C
SD Card
Camera Sync Input